

Intelligent LED Driver (Constant Voltage)

- Adopt SAMSUNG/COVESTRO V0 flame resistant polycarbonate protective housings with small size and light weight.
- Bluetooth 5.0 SIG Mesh with high networking capability are reliable and stable.
- With soft-on and fade-in dimming function enhancing visual comfort.
- Support control iOS or Android devices through Bluetooth connection.
- 0-100% dimming range, down to 0.1%.
- Energy-efficient driver: Efficiency 93%, PF>0.98, THD<6%.
- Comply with the EU's ErP Directive, standby power consumption<0.5W.
- Innovative thermal management technology protects the power life intelligently.
- Overheat, overvoltage, overload, short circuit protection and automatic recovery.
- The design of removable end housing is convenient to adjust the length of driver.
- Suitable for indoor light applications of I / II / III type.
- Up to 50,000-hour life time.
- 5-year warranty (Rubycon capacitor).



Flicker Free
IEEE 1789

Dimmable:
0.1%-100%




Technical Specs

Model		LM-150-24-G1B2		LM-150-12-G1B2	
OUTPUT	Output Voltage	24Vdc			12Vdc
	Output Voltage Range	24Vdc ± 0.5Vdc			12Vdc ± 0.5Vdc
	Output Current	Max. 6.25A			Max. 12.5A
	Output Power	Max. 150W			
	Output Power Range	0~150W			
	Strobe Level	High frequency exemption level			
	Dimming Range	0~100%, down to 0.1%			
	Overload Power Limitation	≥102%			
	Ripple	Switch ripple≤200mV, noise≤500mV			Switch ripple≤200mV, noise≤800mV
PWM frequency	3600Hz				
INPUT	Dimming Interface	Bluetooth 5.0 SIG Mesh			
	Input Voltage	220-240Vac, 200-280Vdc			
	Frequency	50/60Hz			
	Input Current	≤0.75A/230Vac			
	Power Factor	PF>0.98/230Vac (at full load)			
	THD	THD<6%@230Vac (at full load)			
	Efficiency (typ.)	93%			92%
	Standby Power Loss	<0.5W			
	Inrush Current	Cold start 45A[Test twidth=500us tested under 50% Ipeak]/230Vac			
	Anti Surge	L-N: 2KV			
Leakage Current	Max. 0.5mA				
ENVIRONMENT	Working Temperature	ta: -20 ~ 50°C tc: 85°C			
	Working Humidity	20 ~ 95%RH, non-condensing			
	Storage Temperature, Humidity	-40 ~ 80°C, 10~95%RH			
	Temperature Coefficient	±0.03%/°C[0-50°C]			
	Vibration	10~500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively			
PROTECTION	Overheat Protection	Intelligently adjust or turn off the output current if the PCB temperature ≥110°C, and recover automatically			
	Overload Protection	Shut down the output when current load≥102%, and recover automatically			
	Short Circuit Protection	Enter hiccup mode if short circuit occurs, and recover automatically			
	Overvoltage Protection	Shut down the output when non-load voltage≥28V, and recover automatically			Shut down the output when non-load voltage≥16V, and recover automatically
SAFETY & EMC	Withstand Voltage	I/P-O/P: 3750Vac			
	Isolation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH			
	Safety Standards	CCC	China	GB19510.1, GB19510.14	
		TUV	Germany	EN61347-1, EN61347-2-13, EN62493	
		CB	CB member states	IEC61347-1, IEC61347-2-13	
		CE	European Union	EN61347-1, EN61347-2-13, EN62384, EN61547	
		KC	Korea	KC61347-1, KC61347-2-13	
		EAC	Russia	IEC61347-1, IEC61347-2-13	
		RCM	Australia	AS 61347-1, AS 61347-2-13	
		EMEC	Europe	EN61347-1, EN61347-2-13, EN62384	
	UKCA	Britain	BS EN 61347-2-13:2014+A1:2017, BS EN 61347-1:2015+A1:2021		
	EMC Emission	CCC	China	GB/T17743, GB17625.1	
		CE	European Union	EN55015, EN61000-3-2, EN61000-3-3, EN61547	
		KC	Korea	KS C 9815, KS C 9547	
		EAC	Russia	IEC62493, IEC61547, EH55015	
		RCM	Australia	EN55015, EN61000-3-2, EN61000-3-3, EN61547	
		UKCA	Britain	BS EN IEC 55015:2019/A11:2020, BS EN 61547:2009, BS EN IEC 61000-3-2:2019, BS EN 61000-3-3:2013/A1:2019	
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547			
	Strobe Test Standard	IEEE 1789			
OTHERS	Gross weight[G.W]	430g±10g			
	Dimensions	352×43×30mm[L xW×H]			

The driver is suitable for connecting resistor current-limiting LED fixture (e.g. LED strip). The inrush current will be dozens of times increased if connecting built-in constant current IC current-limiting LED fixtures, the driver will activate the overloaded protection (hiccups flickering). When you order, please remark controlling the constant current LED fixture (e.g. MR16 lamp, underground light, LED wall washer, constant current LED strip, etc.), so that we can prepare them with special procedures.


Product Size

Unit: mm

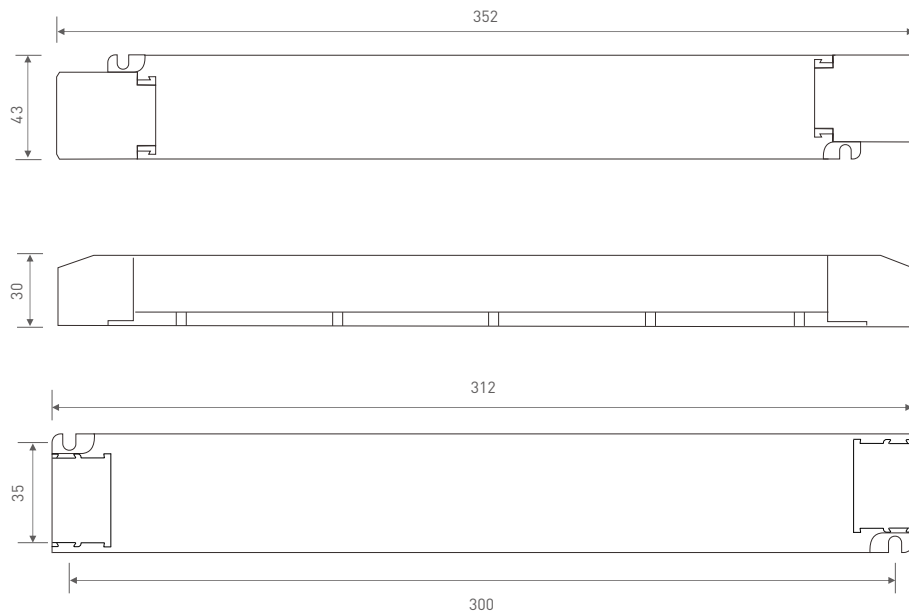


Wiring Diagram

Wireless connection mode

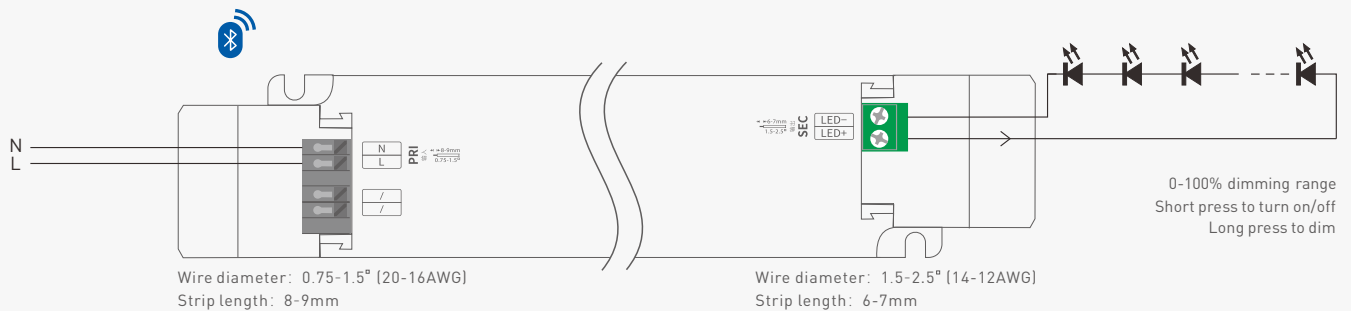

* Access the network to control through App and Bluetooth


Protective Housing Application Diagram

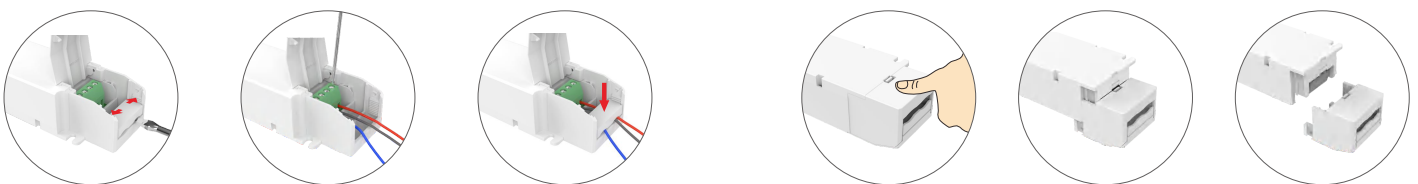



Open the protective housing and push the side housing outwards to pry up the wire fixing board with a screwdriver. Then connect to electrical wires as wiring diagram shows. Press down the wire fixing board to fix the electrical wires, finally close the protective housing.

Press down the back side of the protective housing and move it from side to side to remove it.



Installation Precautions





Please do not stack the products. The distance between two products should be $\geq 15\text{cm}$ so as not to affect heat dissipation and the lifespan of the products.




Please do not place the products on the floor. The distance between the product and the floor should be $\geq 100\text{cm}$ so as to avoid signal interference.



Please do not place the products near a large area of metal objects (such as metal stud ceilings). The distance between the product and the metal object should be $\geq 15\text{cm}$ so as to avoid signal interference.




Please do not install the products on beams or near the corners. The distance between the product and the beam or the corner should be $\geq 15\text{cm}$ so as to avoid signal interference.




Relationship Diagrams


Efficiency vs Load

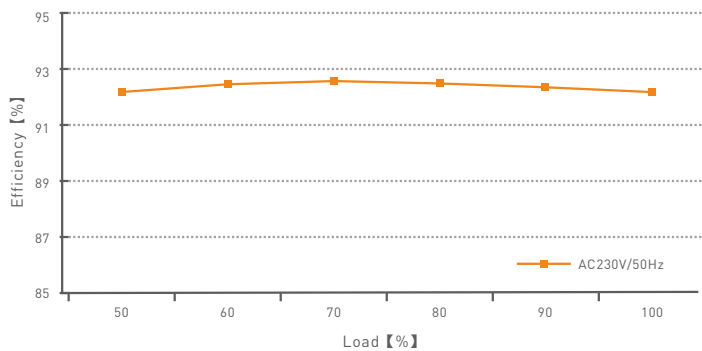


Power Factor Characteristic

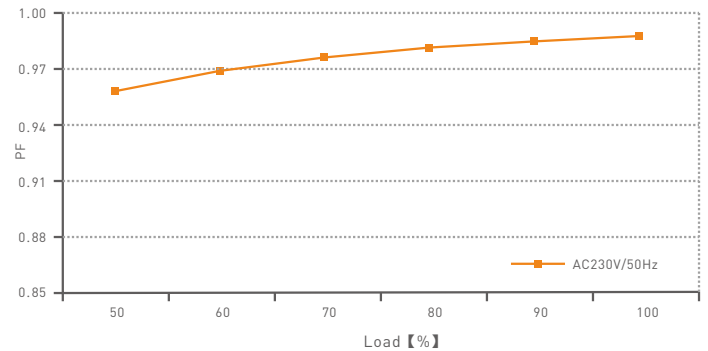





THD VS Load

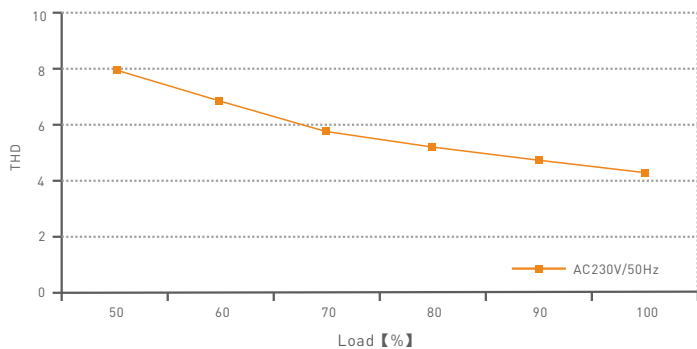

Over Load Diagram

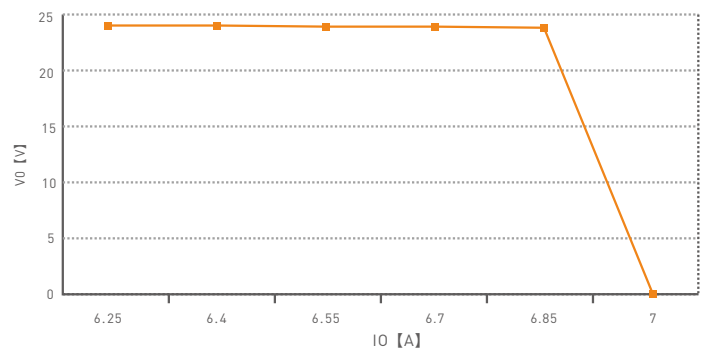

LM-150-24-G1B2

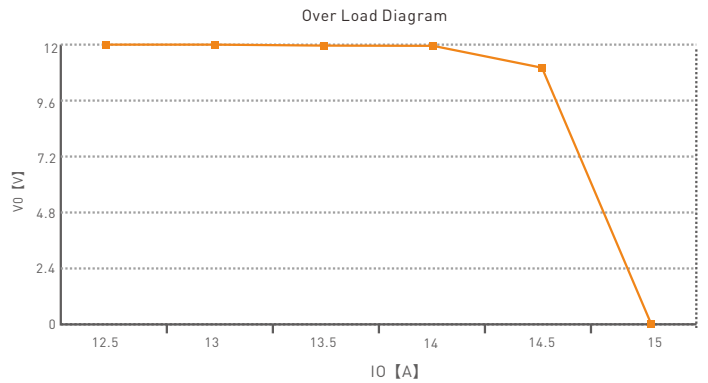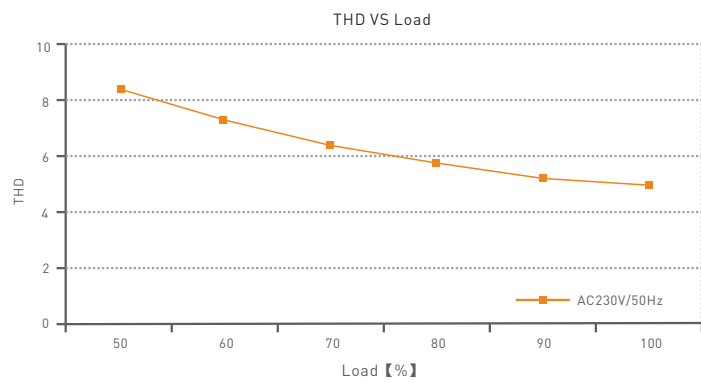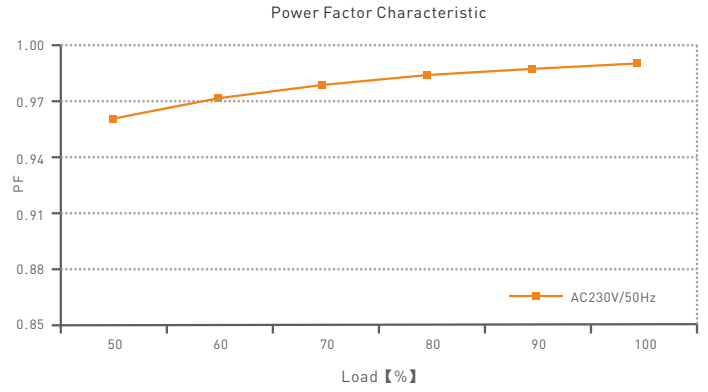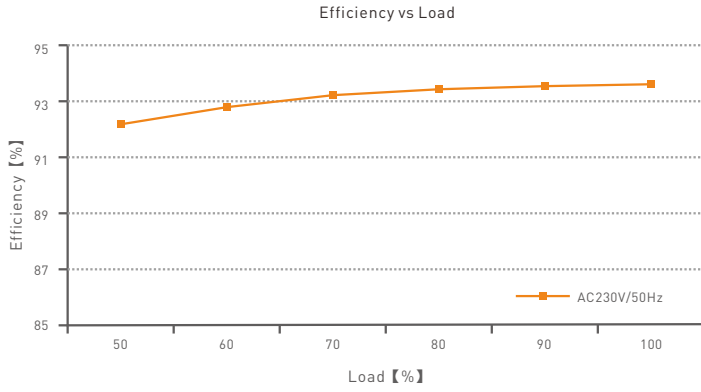

LM-150-12-G1B2


Flicker Test Table

IEEE 1789


Limit Value of Modulation in Low Risk Areas	
Waveform frequency of optical output	Limit value [%]
$f \leq 8\text{Hz}$	0.2
$8\text{Hz} < f \leq 90\text{Hz}$	$0.025 \times f$
$90\text{Hz} < f \leq 1250\text{Hz}$	$0.08 \times f$
$f > 1250\text{Hz}$	Exemption assessment
Limit Value of Modulation in No Effect Areas	
Waveform frequency of optical output	Limit value [%]
$f \leq 10\text{Hz}$	0.1
$10\text{Hz} < f \leq 90\text{Hz}$	$0.01 \times f$
$90\text{Hz} < f \leq 3125\text{Hz}$	$[0.08/2.5] \times f$
$f > 3125\text{Hz}$	Exemption assessment (High frequency exemption)

Brightness

- ▲ 0.1 %
- ◆ 1 %
- ▲ 5 %
- ◆ 10 %
- 20 %
- ▲ 30 %
- 40 %
- ★ 50 %
- 60 %
- 70 %
- 80 %
- ★ 90 %
- ◆ 100 %

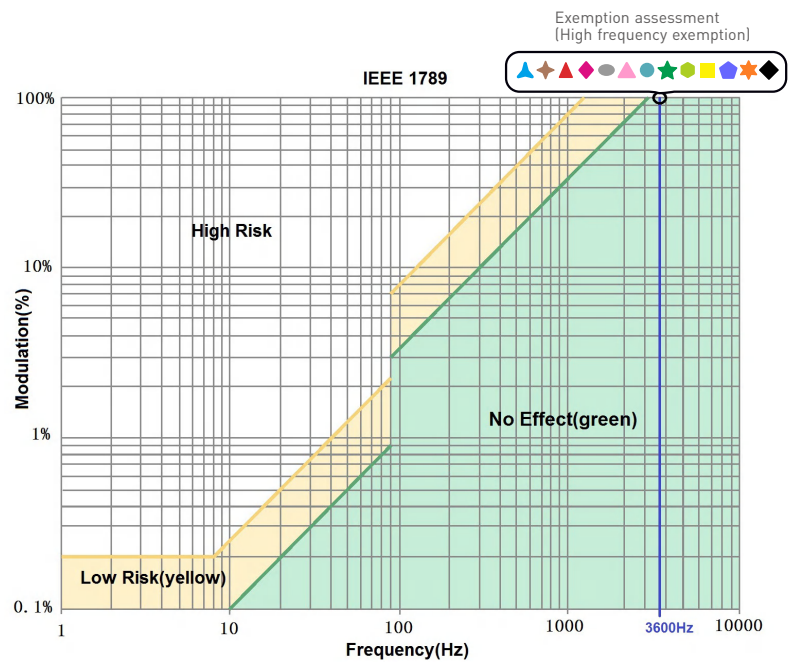


System Diagram

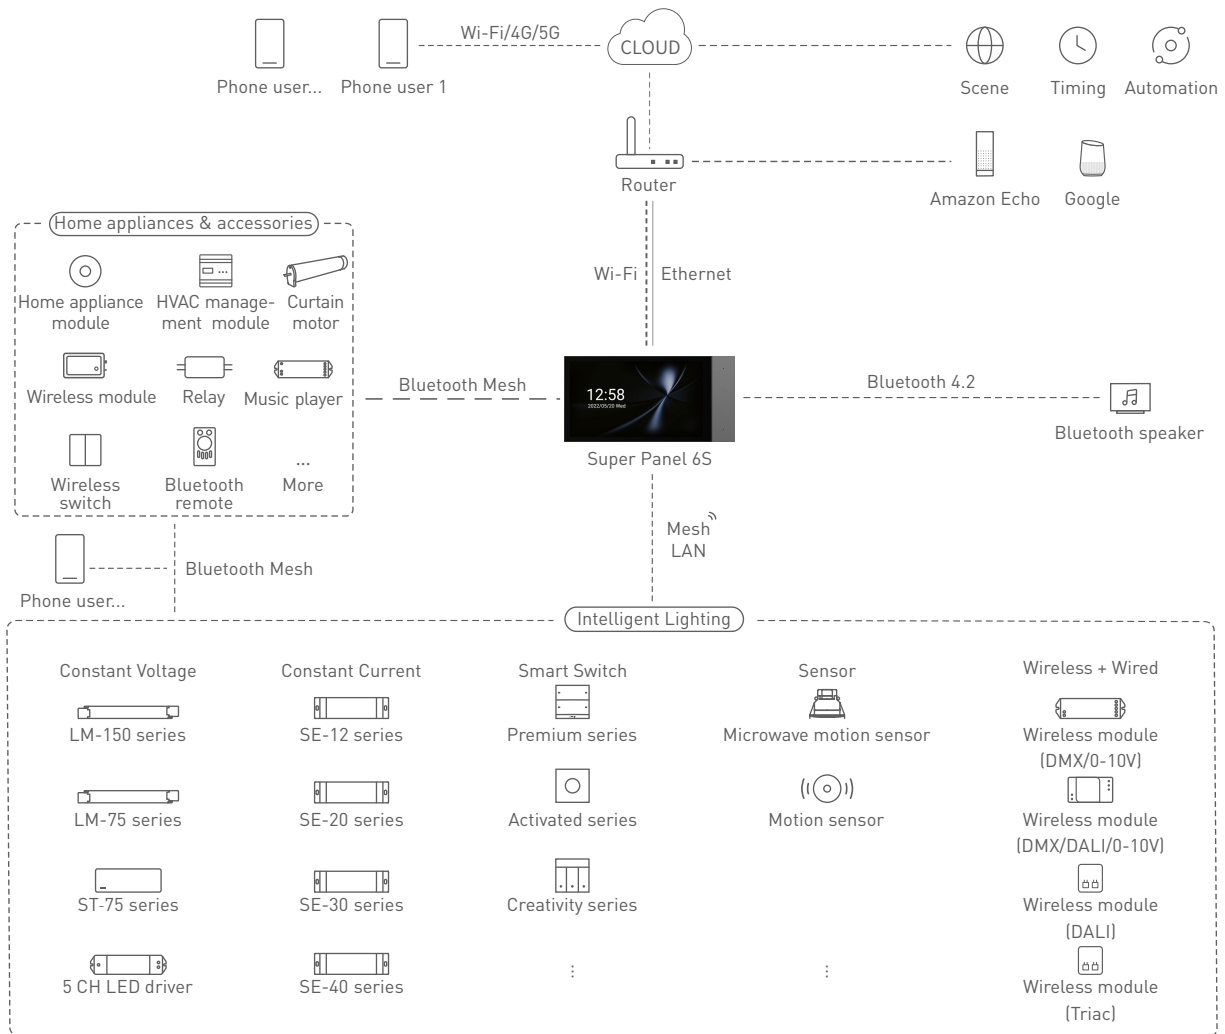


Recommend Applications


1. Achieve fast dimming control.

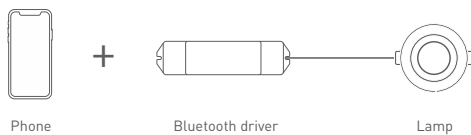

2. Both App and remote can control the driver after connecting the remote to the driver with App.

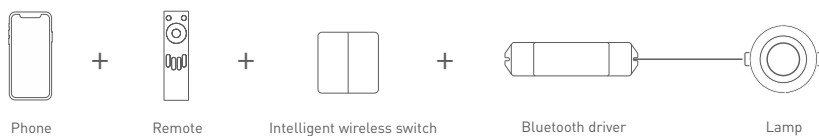

3. Both App and Super Panel 6S can control the driver simultaneously after connecting the Super Panel 6S to the driver with App. By connecting the Super Panel to network, you are allowed to control the driver, cloud scenes and automation remotely with App.

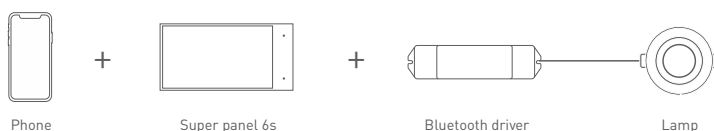

4.More applications of intelligent control are waiting for you to set up.

App Operating Instructions

1. Register an account




The App is available on iOS or Android devices. Scan the QR code below with you mobile phone and follow the prompts to complete the App installation. Open the App to log in or register an account.



Scan and download the APP




2. Paring instructions

Open the APP and create a home if you are a new user. Click "+" icon in the upper right corner and access the "Add Device" list, then follow the prompts to add the device. Pick "Smart lighting-DIM light" from the list and follow the prompts to power on the device firstly. Make sure the device is not connected to the network. Then click "Bluetooth Search" and follow the prompts to add the device.

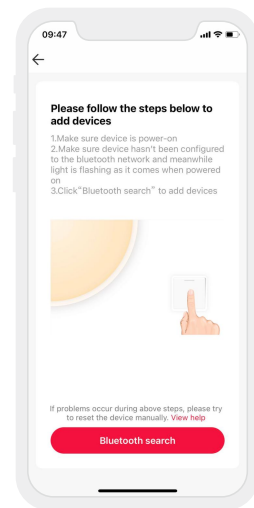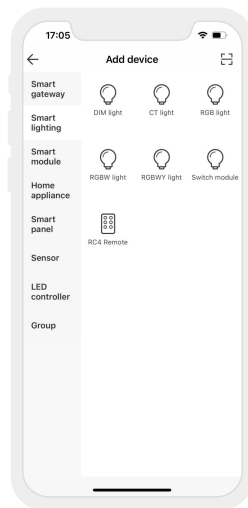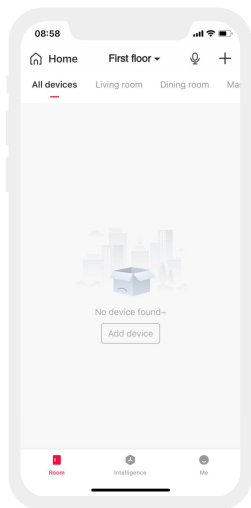


3. Control interface settings

After pairing up your device, go to the control interface. You'll be able to achieve your desired lighting effects by changing brightness. Click "Theme" and you'll easily switch to multiple theme lighting effects with one tap. Click "Mode" and the App provides you editable advanced modes. Customize dynamic modes to put you into a more colorful life.

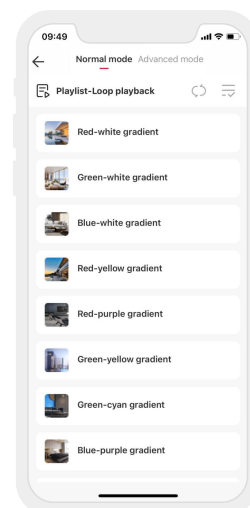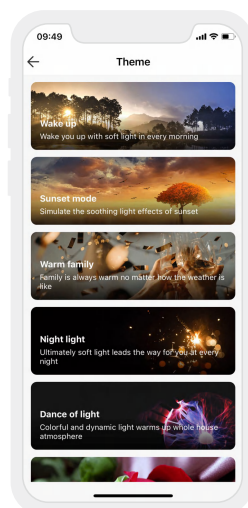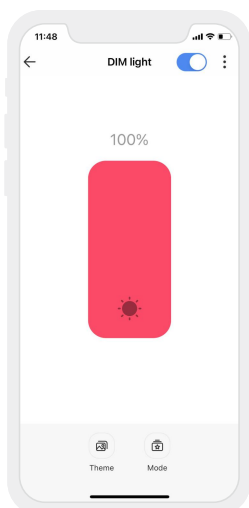


4. Light groups

Users are able to combine the same type of light fixtures into a group to control them simultaneously. Once you create the group, you can set the dim level more easily. Pick "Group-DIM light group" from the list. Follow the prompts to rename the group and click "Next" to pick the lights you are going to group together and click "Save".

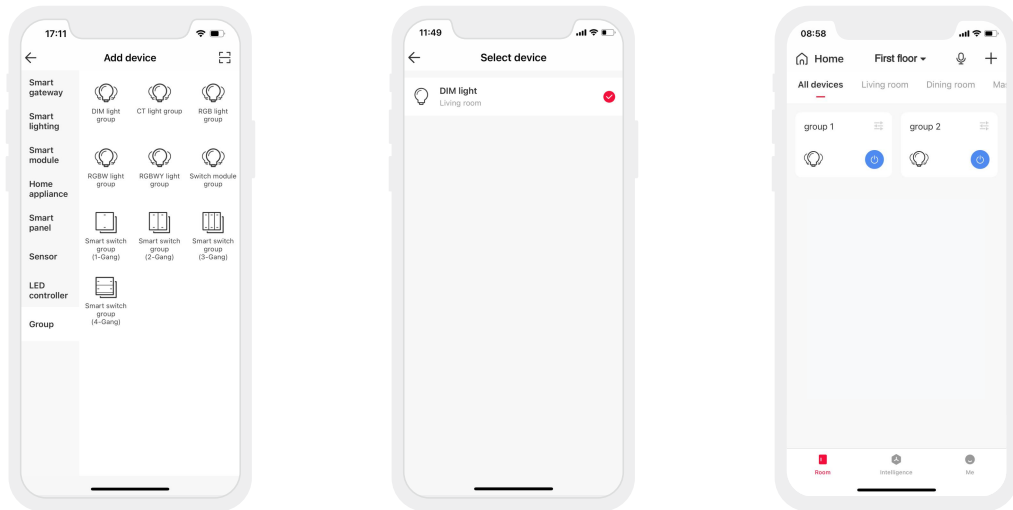


5. Advanced functions

This driver can be linked up with gateway function devices (such as Super Panel 6S) to achieve the advanced functions from local scenes and cloud scenes to automation.

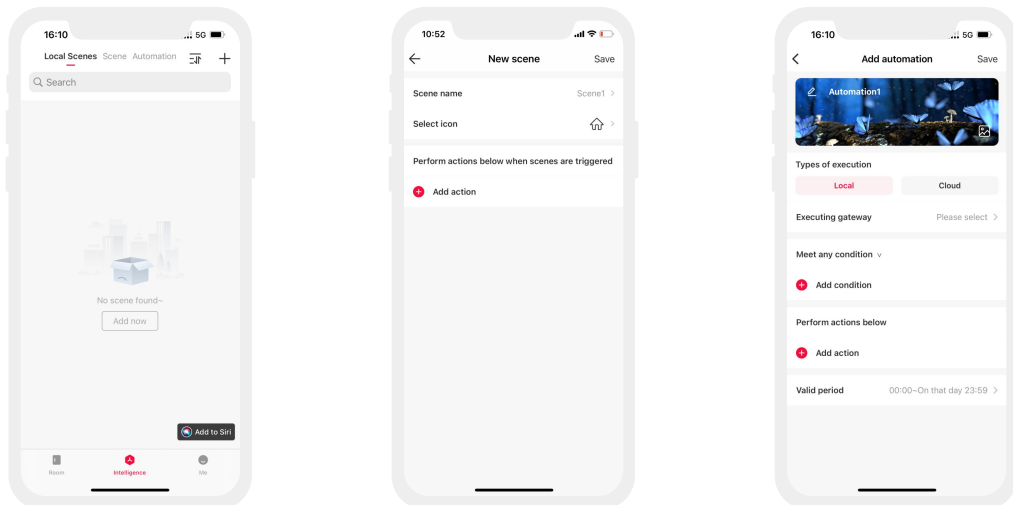

Reset The Device (Reset to factory defaults)

Make sure the driver is well-connected to a lamp and the lamp is on, turn it off with the switch and after 15s turn it on. After 2s, turn it off again. Repeat the same operation 6 times. When the lamp flashes 5 times, reset the device to factory defaults successfully.




Under the driver being power-on

Turn it off 15s Turn it on 2s
(Repeat 6 times)

Packaging Specifications

Model	LM-150-24-G1B2 / LM-150-12-G1B2
Carton Dimensions	370×340×93mm[L×W×H]
Quantity	10PCS/Layer; 2Layer/Carton; 20PCS/Carton
Weight	0.43kg/PC; 9.4kg±5%/Carton

Packaging Image

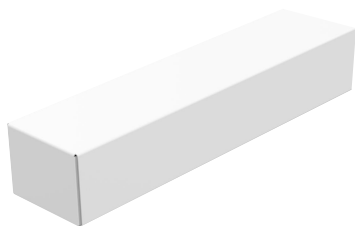

Inner Packaging Box



Carton Packaging

Transportation and Storage

1. Transportation

Products can be shipped via vehicles, boats and planes.

During transportation, products should be protected from rain and sun. Please avoid severe shock and vibration during the loading and unloading process.

2. Storage

The storage conditions should comply with the Class I Environmental Standards. The products that have been stored for more than six months are recommended to be re-inspected and can be used only after they have been qualified.

FAQs

1. What should I do if I fail to add the device?
 - 1.1 Please make sure the device is powered on normally and is in the activated mode.
 - 1.2 Please make sure the device hasn't been added by any other account. If it did, please reset to factory defaults manually.
 - 1.3 The recommended distance between the mobile phone and the device is no more than 20 meters.
 - 1.4 If the device has been forced to delete, please reset to factory defaults manually and then add the device again.
2. What should I do if the device disconnects from the network?
 - 2.1 Please make sure the device is powered on normally.
 - 2.2 Please make sure the router works with network available.
 - 2.3 If you control the device remotely, please make sure your phone network works normally.
3. How to control remotely and set cloud scenes?

Remote control and cloud scenes can achieved only by working with LTECH Super Panel.
4. How to share control of your home devices?

Please go to "Me" - "Home Management" and access the home you want to share. Click "Add Member" and follow the prompts to add members into your home.

Attentions

- This product must be installed and adjusted by a qualified professional.
 - This product is non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
 - Good heat dissipation will extend the life the product. Please install the product in a environment with good ventilation.
 - When you install this product, please avoid being near a large area of metal objects or stacking them to prevent signal interference.
 - Please keep the product away from a intense magnetic field, a high pressure area or a place where lightning is easy to occur.
 - Please check whether the working voltage used complies with the parameter requirements of the product.
 - Before you power on the product, please make sure all the wiring is correct in case of incorrect connection that may cause a short circuit and damage the components, or trigger a accident.
 - If a fault occurs, please do not attempt to fix the product by yourself. If you have any question, please contact the supplier.
- * This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

Warranty Agreement

- Warranty periods from the date of delivery: 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.

Update Log

Version	Updated Time	Update Content	Updated by
A0	2021.04.09	Original version	Liu Weili
A1	2021.06.05	Update TUV certification icon	Liu Weili
A2	2021.12.10	Update product silk screen	Liu Weili
A3	2023.03.15	The warranty period is changed to 5 years	Liu Weili