

LED Current Selection

The current can be easily configured by choosing the correct combination of the DIP switches


DIP switch		⬇ ⬇ ⬇	⬇ ⬇ ⬆	⬆ ⬆ ⬆	⬆ ⬆ ⬆	⬆ ⬆ ⬆	⬆ ⬆ ⬆	⬆ ⬆ ⬆	⬆ ⬆ ⬆	ON OFF
TD-10-100-400-E1P1	Output Current		100mA	150mA	200mA	250mA	300mA	350mA	400mA	
	Output Voltage		10-45V	10-45V	10-45V	10-40V	10-33V	10-28V	10-25V	
	Output Power		1-4.5W	1.5-6.75W	2-9W	2.5-10W	3-9.9W	3.5-9.8W	4-10W	
TD-10-350-700-E1P1	Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	
	Output Voltage	3-24V	3-24V	3-22V	3-20V	3-18V	3-16V	3-15V	3-14V	
	Output Power	1.05-8.4W	1.2-9.6W	1.35-9.9W	1.5-10W	1.65-9.9W	1.8-9.6W	1.95-9.75W	2.1-9.8W	

* After current setting by DIP switch, power off and then power on to make the new current effective.

* E.g. LED 3.2V/pcs:


3-24V can power 1-7pcs LEDs in series, 3-14V can power 1-4pcs LEDs in series, the maximum quantity of LEDs in series will be subject to the actual voltage of LED.

Wiring Diagram

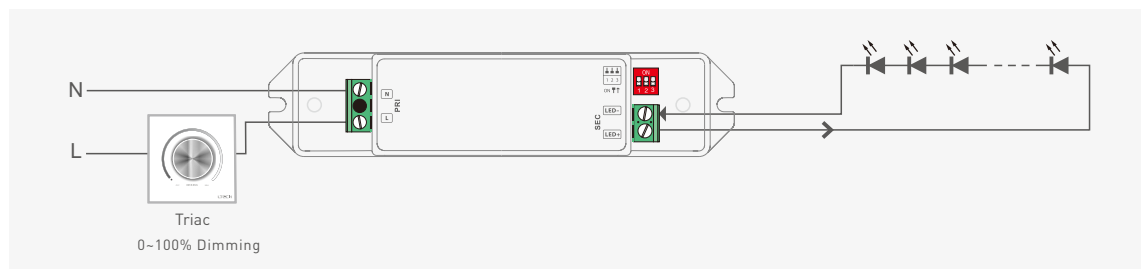

Dimensions

Unit : mm

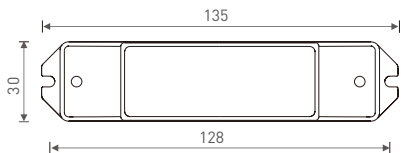

* No further notice if any changes in the manual.
Product function depends on the goods.
Please feel free to contact our official distributor if any question.

LED电流选择


DIP开关快速选择 8 档电流值

DIP开关		⬇⬇⬇	⬇⬇⬆	⬇⬆⬆	⬆⬆⬆	⬆⬆⬆	⬆⬆⬆	⬆⬆⬆	⬆⬆⬆	ON OFF
TD-10-100-400-E1P1	电流输出		100mA	150mA	200mA	250mA	300mA	350mA	400mA	
	电压输出		10-45V	10-45V	10-45V	10-40V	10-33V	10-28V	10-25V	
	功率输出		1-4.5W	1.5-6.75W	2-9W	2.5-10W	3-9.9W	3.5-9.8W	4-10W	
TD-10-350-700-E1P1	电流输出	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	
	电压输出	3-24V	3-24V	3-22V	3-20V	3-18V	3-16V	3-15V	3-14V	
	功率输出	1.05-8.4W	1.2-9.6W	1.35-9.9W	1.5-10W	1.65-9.9W	1.8-9.6W	1.95-9.75W	2.1-9.8W	

* DIP开关设置不同的电流后，需要断电后再通电，这样新设置的电流才有效。


* 假设LED的电压是3.2V/颗：电源3-24V的输出电压范围可串联1-7颗LED，3-14V的输出电压范围可串联1-4颗LED，最大串联数量以LED实际电压为准。

连线图

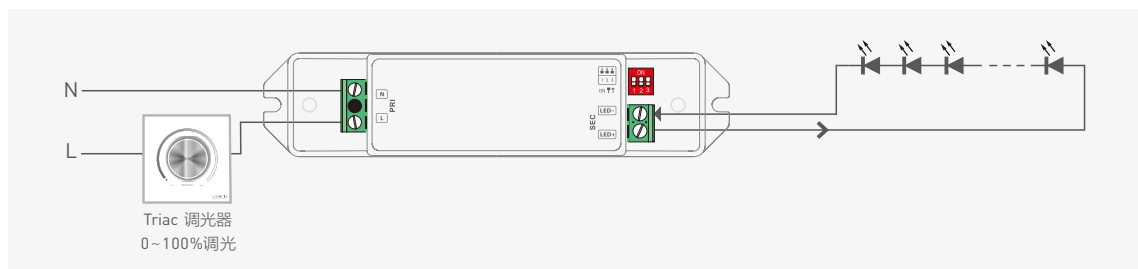

尺寸图

单位：mm

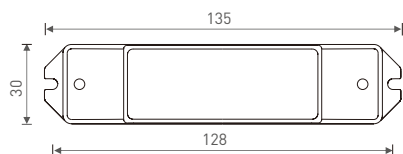

* 本说明书的内容如有变更，恕不另行通知。
若内容与您使用的功能有所不同，则以实物为准。
如有疑问，欢迎向我司授权的经销商咨询。