

Smart Remote

Operating Instruction

Direction for Use

Open WLAN via mobile phone, connect to the wireless router. Then scan QR Code to download the APP via mobile phone.






iOS/Android

Turn on APP, enter "My Device" interface, click " + "icon, when the ambient light is blue and flicking.

[Or long press the touch key for 6 seconds till blue light flicking, then match the remote with APP]





3 Enter "Network devices" interface, choose" Smart Remote" and follow the prompts to connect.



The blue light is on if successfully connect to the device, now start intelligent control via mobile phone.





5 Click "smart remote" icon, enter "Remote" interface, click " + "icon to add remotes. According to the type and brand of remotes to do the next steps.





- Remotes selection failed if no response from the appliances, then try next group. Get response from the appliances means matched successfully.
 - (The smart phones need connect the network when matching)





7 Once successfully connect to the appliances that will immediately open intelligent life and realize long-distance control via mobile phone.



Scan QR Code to download the APP






L-Home

Website: www.ltech-led.com E-mail: It@Itechonline.com

Installation Suggestions

Hang on the wall or on the table, please install it in an open space. Make sure there is no shelter above and ahead. To get the signal well, should install the remote and appliances in the same room.

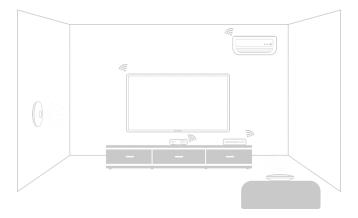

Attention

- Please install the remote in an open space, make sure no shelter above and ahead of it.
- Please use 5V/1A power adapter for the remote. Please don't use USB interface on the computer to power.
- · Please don't use it in wet environment.
- No personal disassembly and open rear cover.
- · No burning, no heat.
- Please don't open, alter, repair or maintenance the remote, or it will not be guaranteed.

Product Parameters

Name Smart Remote

Model: IR-WF-A

Input Voltage: 5Vdc, 1A

Remote Type: IR

Infrared frequency: 38KHz

Wireless Type: WiFi 2.4GHz

Wireless Standard: IEEE 802.11 b/g/n

Wording Temperature: -20°C~60°C

Dimensions: L109×W109×H25(mm)

Packing Size: L115×W115×H52(mm)


Weight(N.W.): 115g

Weight(G.W.): 235g

Package Content



USB cord 1pcs




10

9

uctions for The First Time

- Plue light is on: match successfully
- · Blue light flicking: in connecting status or restore factory setting
- Red light flicking: the wireless router is offline or the WiFi password is wrong.



Warranty Agreement:

- 1. We provide lifelong technical assistance with this product:
 - A 2-year warranty is given from the date of purchase. The warranty is for free repair or replacement if cover manufacturing faults only.
 - For faults beyond the 2-year warranty, we reserve the right to charge for time and parts.
- 2. Warranty exclusions below:
 - Any man-made damages caused from improper operation, or connecting to excess voltage and overloading.
 - The product appears to have excessive physical damage.
 - . Damage due to natural disasters and force majeure.
- Warranty label, fragile label and unique barcode label have been damaged.
- The product has been replaced by a brand new product.
- Repair or replacement as provided under this warranty is the exclusive remedy to the customer. We shall not be liable for any incidental or consequential damages for breach of any stipulation in this warranty.
- 4. Any amendment or adjustment to this warranty must be approved in writing by our company only.
- ★ This manual only applies to this model. We reserve the right to make changes without prior notice.

Common Question and Answer

1. Does this product has requirement for the phone model?

Yes, please use Android $4.0~\mathrm{or}$ above system, iOS $8.0~\mathrm{or}$ above system, and mobile phone with WiFi function.

2. How to reset the remote?

Long press the touch button for 6 seconds to cut the connection with router and re-enter the matching state.

- 3. If remote match failed, please check if there are problems as below:
- 3.1 5G WiFi signal is unsupported.
- 3.2 WiFi hidden network setting is unsupported.
- 3.3 The router don't connect to the network.
- 3.4 Public WI-FI is not available.
- 3.5 Please check if WI-FI network unblocked.
- 3.6 Check the WiFi password.
- 3.7 Too many devices connect to router.
- 4. Does this product can be connected by two or more mobile phones?

Yes, there is no quantity limit on the mobile phone.

5. Does it has a requirement for router?

No, supporting all brand router with WiFi function.

- 6. Should the router connected to the network?
- 6.1 Yes, please connect to the network when select the appliances brands.
- 6.2 Yes, please connect to the network for long-range remote control.
- $7. \ \ \text{How to restore the factory setting?}$

Long press the reset key on the bottom of the smart remote for 6 seconds.

www.ltech-led.com